


1..


Take out hopper
and 1st canister

Close slide first

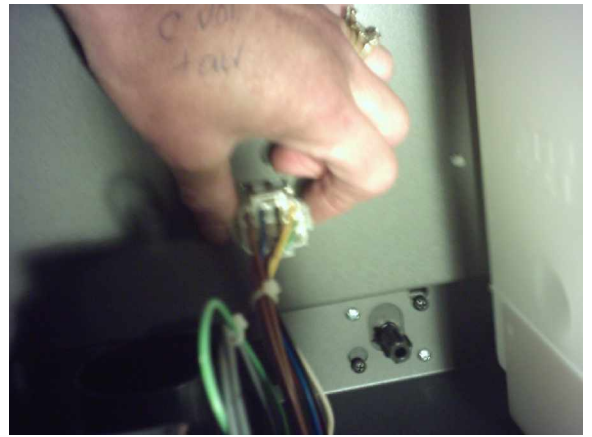


2.

Squeeze sides of
plug and pull very
hard, takes some
strength

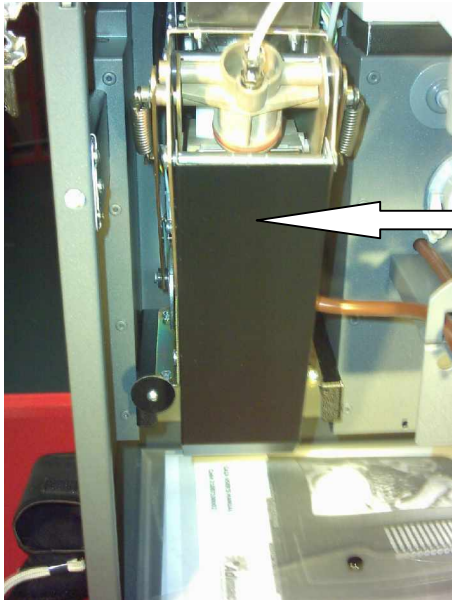


3.

Lift splash plate up
and forward, will have
to giggle this a bit.
Look at the side of it
to see the shape of
the hooks holding it in.

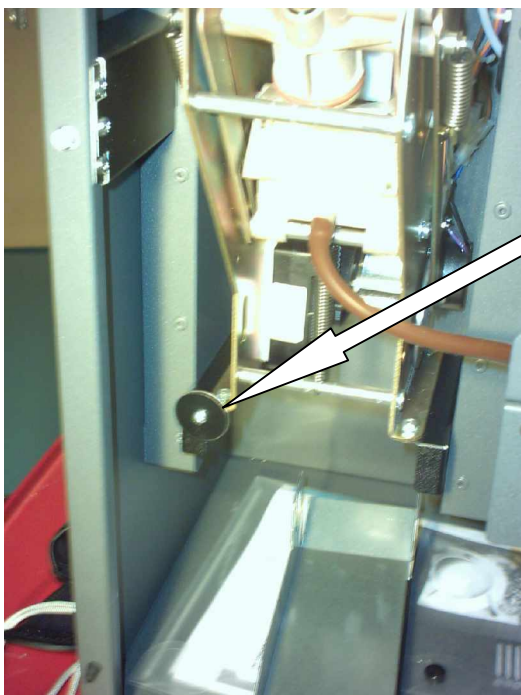

4.

Undo the screw and take off the
disk holding the brewer in place

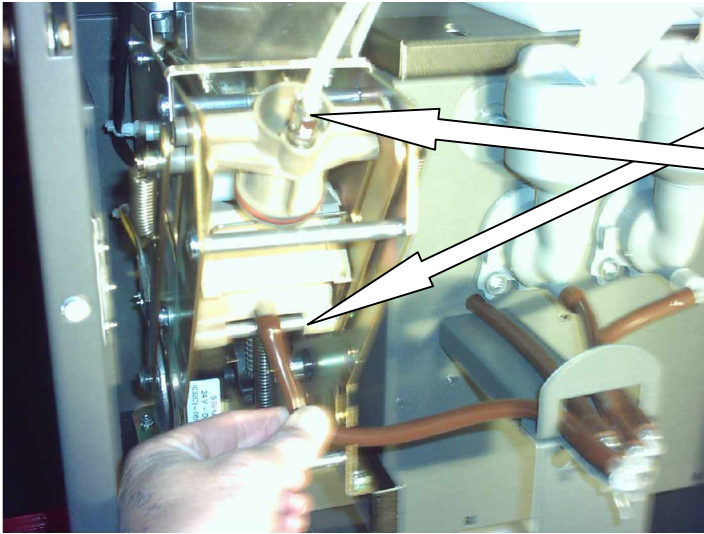


5.

Gently pull the water hose off the bottom of the presser

Carefully undo the nut at the bottom of the water inlet at the top of the presser.


When you replace the pipe at the top of the presser make it finger tight and then just a little more with a crescent. Too tight and you will crack the presser

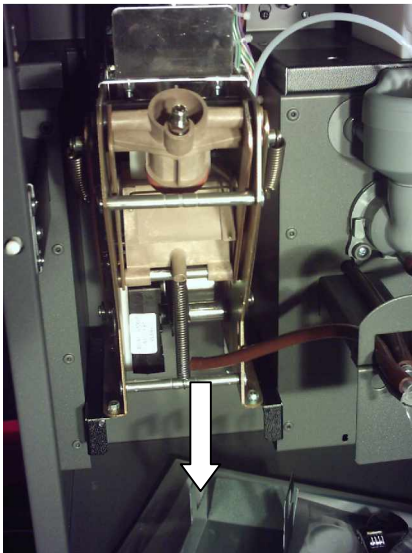

6.

Slide the whole unit forward approx 5cm and lift up

The back bolts are sitting in a keyway, see below

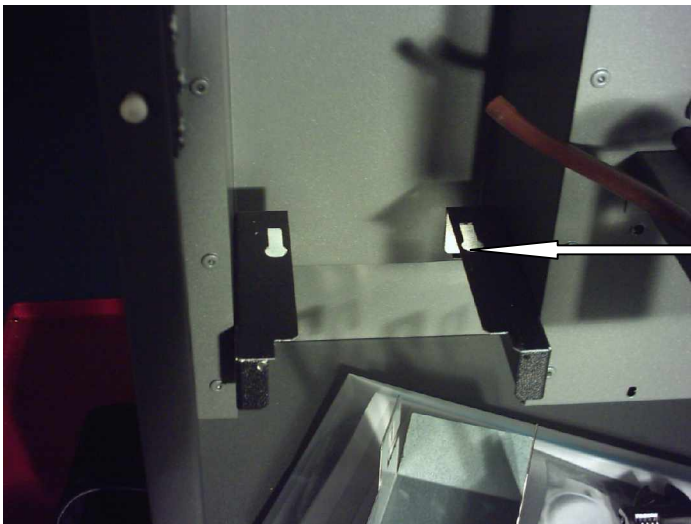

This is the keyway slots you will be attempting to remove the unit from and then replacing the new unit into

CHANGING THE BREWER UNIT OVER

Turn off the machine before attempting any of the following

1. Remove the hopper and 1st canister to allow you room to move
2. Lift the cover up and off the front of the brewer unit; look at the side so that you can see the shape of the hooks holding the cover on.
3. Pinch the plug at the back of the cabinet, this unhooks all the electrics. Pinching the front of the plug on the sides allows the two clips holding it to open. You need strong fingers for this.
4. Unscrew the plate that holds the brewer in place – don't lose it.
5. Gently pull the brown water pipe from the bottom of the brewer, don't split it
6. The water pipe coming through the cabinet wall onto the top of the presser has to be unscrewed, only the top nut, take extreme care because the presser will split if not done gently.
7. The unit should be free to come away from the machine, look at the last picture, this shows that the two nuts at the back will allow the unit to slide forward and then pull up and out, with a little jiggle

OK you are now ready to reverse all steps

7. Set the new unit back on the base plate, slip back and down into the keyway slot
6. When replacing it the top inlet nut, take care that this should be done up finger tight and then just a smidge more, enough to make a good seal.
5. The brown hose end may need to be soaked in a cup full of hot water to allow it to slide back onto the pipe, push back as much as possible. Check to see there are no splits in it.
4. Screw the round plate back on in front of the left foot. Otherwise the whole unit will rattle and drive everyone nuts
3. Squeeze the electrical plug back into setting making sure it is firmly seated.
2. Place the black cover over the front of the unit; aim the bottom into place first.
1. Place your hopper and canister back in place, open the coffee slide

Turn machine on again and make a long black.